

Optical Engineering

OpticalEngineering.SPIEDigitalLibrary.org

97- μ J single frequency linearly polarized nanosecond pulsed laser at 775 nm using frequency doubling of a high-energy fiber laser system

Qiang Fang
Xuelong Cui
Zhuo Zhang
Liang Qi
Wei Shi
Jinhui Li
Guoqing Zhou

SPIE

Qiang Fang, Xuelong Cui, Zhuo Zhang, Liang Qi, Wei Shi, Jinhui Li, Guoqing Zhou, "97- μ J single frequency linearly polarized nanosecond pulsed laser at 775 nm using frequency doubling of a high-energy fiber laser system," *Opt. Eng.* **56**(8), 086112 (2017), doi: 10.1117/1.OE.56.8.086112.

97- μ J single frequency linearly polarized nanosecond pulsed laser at 775 nm using frequency doubling of a high-energy fiber laser system

Qiang Fang,^{a,b} Xuelong Cui,^a Zhuo Zhang,^{b,c} Liang Qi,^a Wei Shi,^{b,d,*} Jinhui Li,^{a,c} and Guoqing Zhou^e

^aShandong HFB Photonics Co. Ltd., Shandong, China

^bTianjin Institute of Modern Laser and Optics Technology, Tianjin, China

^cTianjin Optera Laser Technology Co. Ltd., Tianjin, China

^dTianjin University, College of Precision Instrument and Optoelectronics Engineering, Tianjin, China

^eGuilin University of Technology, Guangxi Key Laboratory for Spatial Information and Geomatics, Guilin, China

Abstract. We report a high-energy ($\sim 97 \mu\text{J}$), high-peak power ($\sim 20 \text{ kW}$), single-frequency, linearly polarized, near diffraction-limited ($M^2 < 1.2$) ~ 4.8 -ns pulsed laser source at 775 nm with a 260-Hz repetition rate. This laser was achieved by frequency doubling of a high-energy linearly polarized all-fiber-based master oscillator–power amplifier, seeded by a single-frequency semiconductor distributed feedback laser diode at 1550 nm. The frequency doubling is implemented in a single-pass configuration using a periodically poled lithium niobate crystal, and a conversion efficiency of 51.3% was achieved. © The Authors. Published by SPIE under a Creative Commons Attribution 3.0 Unported License. Distribution or reproduction of this work in whole or in part requires full attribution of the original publication, including its DOI. [DOI: 10.1117/1.OE.56.8.086112]

Keywords: single frequency; frequency doubling; high-energy fiber laser.

Paper 170735 received May 15, 2017; accepted for publication Aug. 2, 2017; published online Aug. 26, 2017.

1 Introduction

Rare-earth-doped glass fiber lasers have seen progressive developments in the past two decades in various aspects, such as high power, high energy, ultrashort pulse width, narrow linewidth (single frequency), etc.^{1,2} Fiber lasers can only operate in certain spectra range, such as 1,³ 1.5,⁴ 2,⁵ or 2.8 μm ,⁶ due to the limit of the emission spectra for the rare-earth-elements doped in glasses. Due to the various non-linear processes, including the Raman, frequency doubling, parametric processes, etc., fiber lasers have been utilized to generate a lot of very attractive coherent sources operating in ultraviolet,⁷ visible,⁸ midinfrared,⁹ and even THz ranges.¹⁰ Fiber-based construction of these laser systems enables robust, compact, and high performance operation.

The frequency doubling of narrow linewidth Er-doped fiber lasers can generate narrow linewidth laser sources around 780 nm, which can be utilized for optical atom cooling, quantum information storage, etc. Thompson et al.¹¹ demonstrated a single-frequency continuous wave (CW) 780-nm laser source with 900-mW laser power, generated from the frequency doubling of a fiber laser system using the cascaded periodically poled lithium niobate (PPLN) crystals. Vyatkin et al.¹² reported a single-frequency CW laser at 780 nm with 5-W average power by frequency doubling a single-frequency linearly polarized CW Er:Yb fiber laser. In this system, the frequency doubling was implemented by single passing one PPLN crystal. Another single-frequency CW laser at 780 nm with watt-level output power was built using the external-cavity-enhanced frequency doubling of an Er-doped fiber laser system.¹³ Some other single-frequency lasers around 780 nm in the CW regime were also reported.^{14–16} The pulsed single-frequency lasers of around

780 nm can find applications in remote sensing, optical metrology, etc. Chiow et al.¹⁷ demonstrated the generation of 43 W of quasicontinuous 780-nm laser light by single-pass frequency doubling of a 1560-nm laser via the combination of two fiber amplifiers. Champert et al.¹⁸ demonstrated a nanosecond pulsed laser at 772 nm by frequency doubling of a distributed feedback (DFB) laser diode seeded ytterbium–erbium fiber amplifier in a periodically poled KTP crystal. Dingjan et al.¹⁹ reported the generation of a 4-ns pulsed laser of 780 nm by single-pass frequency doubling of an EDFA-boosted 1560-nm diode laser for excitation of a single trapped rubidium atom. Hu et al.²⁰ demonstrated a fiber-integrated laser source at 780 nm, producing 410-ps pulses at a repetition rate of 50 MHz and with 3.5-W average power. Some other pulsed lasers around 780 nm were also reported.^{21,22} The pulse energy of these pulsed lasers is at the tens of nano-Joule to several micro-Joule level, and the peak power is below 1 kW due to the high repetition rate of these laser pulses.^{18–22} Nanosecond laser pulses at 780 nm with tens of kilowatts peak power are demanded in a lot of applications, such as long-range remote sensing, materials processing, etc.

In this paper, we report a single-frequency, linearly polarized, near diffraction-limited, pulsed laser source at 775 nm by frequency doubling a single-frequency nanosecond pulsed all-fiber-based master oscillator–power amplifier (MOPA) and seeded by a fiber coupled semiconductor DFB laser diode at 1550 nm. This 775-nm laser can provide ~ 4.8 -ns single-frequency laser pulses with a 260-Hz repetition rate, ~ 97 - μJ pulse energy, and ~ 20 -kW peak power.

2 Low Repetition Rate High-Energy Fiber Laser System

Figure 1 demonstrates the diagram of the high-energy, single-frequency, linearly polarized laser at 775 nm. It consists

*Address all correspondence to: Wei Shi, E-mail: shiwei@tju.edu.cn

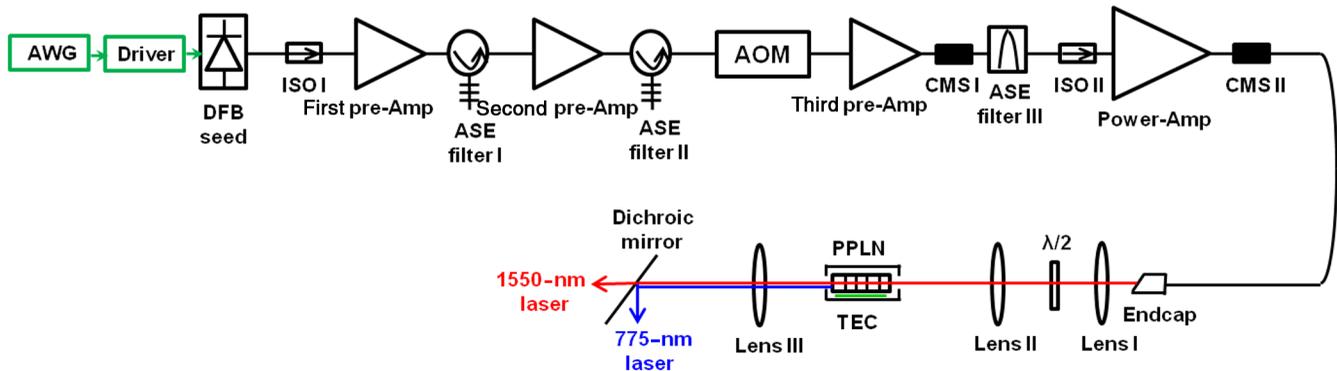


Fig. 1 The diagram of the high-energy, single-frequency, linearly polarized laser at 775 nm.

of a high-energy monolithic MOPA seeded by a single-frequency fiber-coupled semiconductor DFB laser diode and a frequency doubling system in a single-pass configuration using a PPLN crystal as a nonlinear medium.

A butterfly laser driver, driven by an arbitrary waveform generator, was utilized to drive the single-frequency fiber coupled semiconductor laser diode with ~ 1 -MHz linewidth to generate nanosecond laser pulses. The pulse shape, pulse duration, and repetition rate of the laser pulses can be easily adjusted by the arbitrary waveform generator. The generated shortest laser pulse is about 5 ns and is limited by the speed of the driver. The laser pulses with ~ 5 -ns pulse durations and 240- to 260-Hz repetition rates was chosen as the seed for the MOPA to achieve the pulse energy and the peak power as high as possible. The pulse energy for the seed pulses is about 50 pJ. The MOPA consists of four stages of the fiber amplifier: two stages of a core-pumped fiber amplifier (first and second preamplifier), one double cladding (DC) fiber amplifier (third preamplifier), and one DC power amplifier. The gain fiber used in the two core-pumped amplifiers is ~ 1 m of commercial polarization-maintained (PM) Er-doped single-mode fiber (from Nufern Inc.) with a ~ 7 - μ m core. The spectral filter, consisting of one circulator and one high reflection fiber Bragg grating, was inserted after each core-pumped preamplifier to clear out the amplified spontaneous emissions (ASE). One acousto-optic modulator (AOM) was inserted after the second spectral filter to gate the pulses to increase the extinction ratio. The gain fiber utilized in the DC fiber preamplifier was ~ 1 m of commercial PM Er/Yb-codoped fiber (from Nufern Inc.) with 12-/130- μ m core/inner cladding. The cladding absorption coefficient at 976 nm is about 10 dB/m. One fiber coupled multimode semiconductor laser diode at 976 nm was utilized as the pump source for this amplifier. One homemade cladding mode stripper (CMS) was utilized to clear out the residual pump and some laser light propagating in the fiber cladding. One bandpass spectral filter centered at 1550 nm was inserted after the CMS to clear out the ASE. The active fiber utilized in the power amplifier was ~ 1 m of commercial PM Er/Yb-codoped fiber (from Nufern Inc.) with 25-/300- μ m core/inner cladding. The cladding absorption coefficient at 976 nm is ~ 9 dB/m. Two fiber-coupled multimode laser diodes at 976 nm were utilized as the pump sources for the power amplifier. The other homemade CMS was utilized to strip out the light propagating in the fiber cladding. One fiber-based PM isolator was inserted between the two DC fiber amplifiers to

prevent the backward propagation light. One commercial endcap (from Optzone Technology Inc.) was utilized as the output end of the whole fiber laser system to avoid any end-face reflection and to prevent the end-face burning from the large peak power density.

Considering the low repetition rate (240 to 260 Hz) of the seed pulses, the multistage synchronous pulse pumping technique was adopted in the four stages of fiber amplifiers to mitigate the ASE in the amplifiers.²³ The time sequence of the seed pulse, the AOM gate pulse, and the pump pulses are shown in Fig. 2. The pulse width for the seed pulse and the AOM gating pulse were fixed as ~ 5 and ~ 60 ns, respectively. The pump pulse widths in four stages of fiber amplifiers are optimized experimentally to achieve the maximum pulse energy and simultaneously to suppress the ASE as much as possible. As shown in Fig. 2, the optimized pump pulse width in the four stages of fiber amplifiers was ~ 1 ms, ~ 1 ms, ~ 300 μ s, and ~ 500 μ s, respectively. The peak power of the pump diodes for the three stages of the preamplifiers was optimized to 230 mW, 380 mW, and 2.5 W, respectively. The pulse energy after the three stages of preamplifiers was measured to be ~ 10 μ J using an Ophir PE10-C pyroelectric energy sensor, which is insensitive to the ASE background and CW signal component. Therefore, the three stages of the preamplifiers produced ~ 53 -dB gain for the seed pulses. Using the same energy sensor, the pulse energy of the laser pulses, which is the output from the power amplifier under different pump levels, was measured and is shown in Fig. 3. When the pump pulses, with ~ 21 -W peak power and ~ 500 - μ s pulse width, were launched into the final power amplifier, the maximum

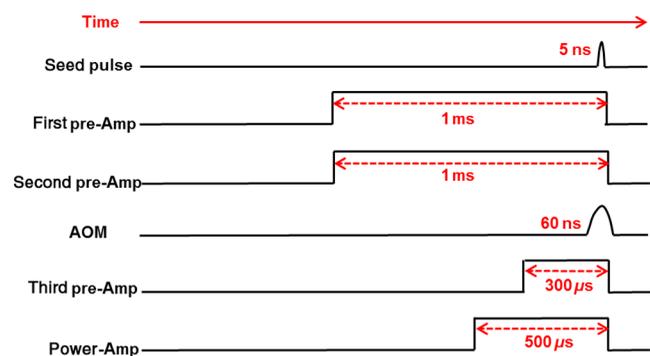


Fig. 2 The time sequence of the seed pulse, the AOM gate pulse, and the pump pulses.

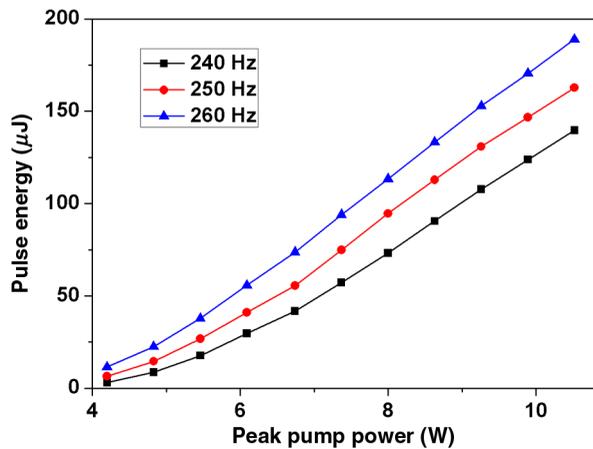


Fig. 3 The output pulse energy for the 1550-nm linearly polarized single-frequency MOPA under different pump levels and with different repetition rates.

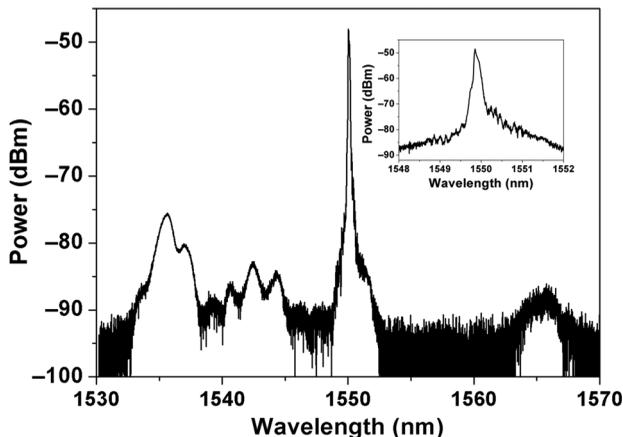


Fig. 4 The output spectrum of the single-frequency laser with $\sim 200\text{-}\mu\text{J}$ pulse energy. Inset: Zoomed-in spectrum of the laser.

pulse energy of ~ 200 , ~ 172 , and $\sim 148\ \mu\text{J}$ was achieved for laser pulses with 260-, 250-, and 240-Hz repetition rate, respectively.

The spectrum of the laser with $\sim 200\text{-}\mu\text{J}$ pulse energy was measured using an optical spectrum analyzer (OSA) with 0.02-nm resolution. As shown in Fig. 4, the laser was centered at $\sim 1550.02\ \text{nm}$. The signal-to-noise ratio (SNR) of $>27.7\ \text{dB}$ was achieved due to the pulse pumping technique adopted in the MOPA. The pulse duration was measured to be $\sim 4.8\ \text{ns}$ using a fast detector and an oscilloscope.

3 Generation of the High-Energy Single-Frequency Laser Pulses at 775 nm

The linear polarized 1550-nm laser pulses with $\sim 200\text{-}\mu\text{J}$ pulse energy, $\sim 4.8\text{-ns}$ pulse duration, and 260-Hz repetition rate were chosen to do the frequency doubling as shown in Fig. 1. The laser output from the endcap was collimated by an aspheric lens (lens I as shown in Fig. 1) with $\sim 15.3\text{-mm}$ focal length and 1550-nm antireflection (AR) coating. The collimated laser beam diameter was $\sim 2.6\ \text{mm}$. One half-wave plate was utilized to adjust the linear polarization of the laser. One plane-convex lens (lens II as shown in Fig. 1), with $\sim 75\text{-mm}$ focal length and 1550-nm AR coating,

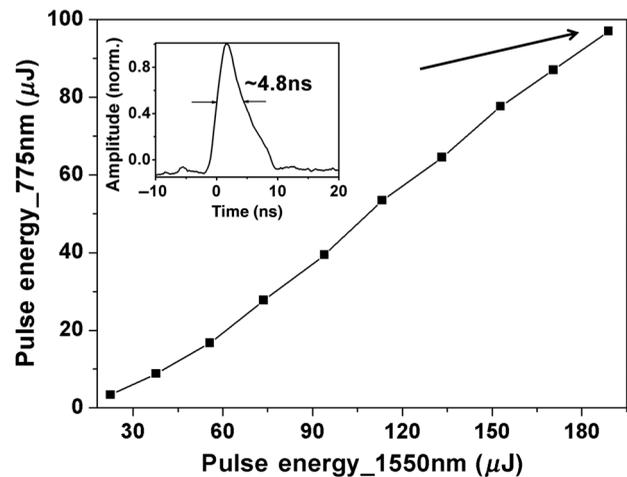


Fig. 5 The output pulse energy of the 775-nm laser as a function of the pulse energy of the 1550-nm laser. Inset: the measured pulse shape of the $\sim 97\text{-}\mu\text{J}$ laser pulses.

was used to focus the laser into the center of the PPLN crystal. The pulse energy of the 1550-nm laser pulses was measured to be $\sim 189\ \mu\text{J}$ after this lens due to the loss from these bulk optics. The diameter of the beam waist and the Rayleigh length were calculated to be $\sim 103\ \mu\text{m}$ and $5.32\ \text{mm}$, respectively. The PPLN crystal is 3-mm long, 1.4-mm wide, and 1-mm thick, with a $19.36\text{-}\mu\text{m}$ domain period chosen for quasi-phase matching at 33°C . It was AR coated at both 1550 and 775 nm. One thermo electric cooler (TEC) was utilized to adjust the temperature of the crystal as shown in Fig. 1. The generated 775-nm laser was collimated by the other plane-convex lens (lens III as shown in Fig. 1) with $\sim 30\text{-mm}$ focal length and the 775-nm AR coating. The residual 1550-nm laser (transmitted) and the collimated 775-nm laser (reflected) were split by a dichroic mirror. Note that we chose the above bulk optics, especially the lens I and II, based on the experimental optimization for the conversion efficiency of the frequency doubling.

The Ophir PE10-C pyroelectric energy sensor was utilized to measure the energy of the generated 775-nm laser pulses. Figure 5 shows the pulse energy of the 775-nm laser when the 1550-nm laser with different pulse energy was launched into the PPLN crystal. The maximum pulse energy of $\sim 97\ \mu\text{J}$ was achieved when the $\sim 189\text{-}\mu\text{J}$ fundamental laser was launched. The corresponding conversion efficiency can be calculated to be 51.3%. Note that, in the experiment, the TEC was utilized to adjust the temperature of the PPLN to optimize the conversion efficiency. When the temperature was adjusted to $\sim 33^\circ\text{C}$, the highest conversion efficiency was achieved. The conversion efficiency can be improved by cleaning the spectrum of the 1550-nm laser (see Fig. 4), using optimized PPLN crystal, etc. The pulse shape was measured using a fast detector and an oscilloscope with a 500-MHz bandwidth. As shown in the inset of Fig. 5, the pulse duration was about 4.8 ns, so the peak power of the generated 775-nm laser pulses reached $\sim 20\ \text{kW}$. The polarization extinction ratio (PER) was also measured to be $\sim 15\ \text{dB}$ based on a half-wave plate and a Glan-laser polarizer. To the best of our knowledge, this is the first demonstration of a $100\text{-}\mu\text{J}$ level, tens of kilowatts peak power level single-frequency linearly polarized 775-nm laser based on the frequency doubling of the fiber lasers.

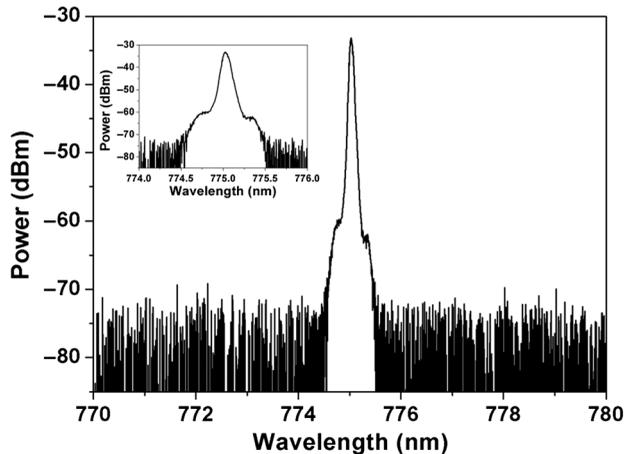


Fig. 6 The measured spectrum of the 775-nm single-frequency linearly polarized laser with ~ 97 - μ J pulse energy. Inset: Zoomed-in spectrum of the laser.

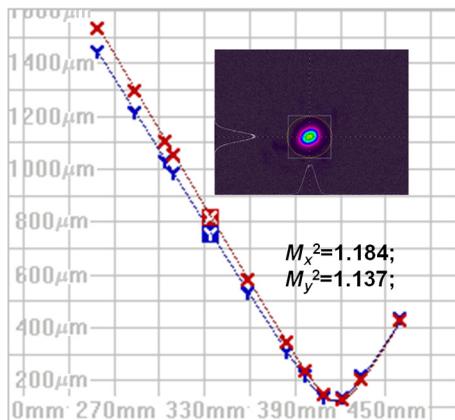


Fig. 7 The measured beam quality factor (M^2) of the 775-nm single-frequency linearly polarized laser with ~ 97 - μ J pulse energy.

The spectrum of the generated 775-nm laser with ~ 97 - μ J pulse energy was measured using an OSA with 0.02-nm resolution and is shown in Fig. 6. The laser was centered at ~ 775 nm, and an SNR of greater than ~ 36 dB was achieved. Compared with the SNR of the fundamental laser (see Fig. 4), the SNR is much better due to the ASE filtering of the process of the double-frequency conversion.

The beam quality for the 775-nm laser with ~ 97 - μ J pulse energy was evaluated with a beam quality factor (M^2) in two orthogonal transverse directions x and y using a commercial beam profile analyzer (M2-200S, Ophir Photonics Inc.). As shown in Fig. 7 the beam quality factor (M^2) was measured to be 1.184 and 1.137 in the x - and y -directions, respectively. Nearly diffraction limited beam quality was achieved.

4 Conclusion

We have successfully implemented a high-energy, single-frequency, linearly polarized, near-diffraction-limited ($M^2 < 1.2$), nanosecond, low repetition rate pulsed laser at 775 nm by frequency doubling of an all-fiber MOPA seeded by a single-frequency DFB laser diode. The 775-nm laser can produce ~ 97 - μ J, ~ 4.8 -ns laser pulses with 260-Hz repetition rate and ~ 15 -dB PER. It is believed that the laser can

be used for a lot of applications, including remote sensing, optical metrology, material processing, etc.

Acknowledgments

This work was supported by the Science and Technology Support Program of Tianjin (No. 15ZCZDZX00970), the Shandong Province Independent Innovation and Achievement Transformation Project (No. 2014ZZCX04212), the National High Technology Research and Development Program (No. 2014AA041901), the National Natural Science Foundation of China (Nos. 61275102 and 61335013), and the Natural Science Foundation of Shandong (No. ZR2014FP015).

References

- W. Shi et al., "Fiber lasers and their applications," *Appl. Opt.* **53**(28), 6554–6568 (2014).
- D. J. Richardson et al., "High power fiber lasers: current status and future perspective," *J. Opt. Soc. Am. B* **27**(11), B63–B92 (2010).
- H. M. Pask et al., "Ytterbium-doped silica fiber lasers: versatile sources for the 1–1.2 μ m region," *IEEE J. Sel. Top. Quantum Electron.* **1**(1), 2–13 (1995).
- J. Nilsson et al., "High power wavelength tunable cladding pumped rare-earth-doped silica fiber lasers," *Opt. Fiber Technol.* **10**(1), 5–30 (2004).
- P. F. Moulton et al., "Tm-doped fiber lasers: fundamentals and power scaling," *IEEE J. Sel. Top. Quantum Electron.* **15**(1), 85–92 (2009).
- X. Zhu et al., "High power ZBLAN glass fiber lasers: review and prospect," *Adv. Optoelectron.* **2010**, 1–23 (2010).
- C. Gu et al., "High power tunable femtosecond ultraviolet laser source based on an Yb-fiber-laser pumped optical parametric oscillator," *Opt. Express* **23**(5), 6181–6186 (2015).
- G. K. Samanta et al., "Stable, 9.6 W, continuous-wave, single-frequency, fiber-based green source at 532 nm," *Opt. Lett.* **34**(10), 1561–1563 (2009).
- M. W. Haakestad et al., "Mid-infrared optical parametric oscillator synchronously pumped by an erbium-doped fiber laser," *Opt. Express* **18**(24), 25379–25388 (2010).
- W. Shi et al., "Single-frequency terahertz source pumped by Q-switched fiber lasers based on difference-frequency generation in GaSe crystal," *Opt. Lett.* **32**(8), 949–951 (2007).
- R. J. Thompson et al., "High power single frequency 780 nm laser source generated from frequency doubling of a seeded fiber amplifier in a cascade of PPLN crystals," *Opt. Express* **11**(14), 1709–1713 (2003).
- M. Y. Vyatkin et al., "High power, 780 nm single-frequency linearly-polarized laser," *Proc. SPIE* **5709**, 125 (2005).
- Y. Ge et al., "Realization of 1.5 W 780 nm single-frequency laser by using cavity-enhanced frequency doubling of an EDFA boosted 1560 nm diode laser," *Opt. Commun.* **334**(1), 74–78 (2015).
- J. Feng et al., "High-efficiency generation of a continuous-wave single frequency 780 nm laser by external-cavity frequency doubling," *Appl. Opt.* **46**(17), 3593–3596 (2007).
- J. Feng et al., "Noise suppression, linewidth narrowing of a master oscillator power amplifier at 1.56 μ m and second harmonic generation output at 780 nm," *Opt. Express* **16**(16), 11871–11877 (2008).
- S. S. Sane et al., "11 W narrow linewidth laser source at 780 nm for laser cooling and manipulation of rubidium," *Opt. Express* **20**(8), 8915–8919 (2012).
- S. Chiow et al., "Generation of 43 W of quasi-continuous 780 nm laser light via high-efficiency, single-pass frequency doubling in periodically poled lithium niobate crystals," *Opt. Lett.* **37**(18), 3861–3863 (2012).
- P. A. Champert et al., "3.5 W frequency-doubled fiber-based laser source at 772 nm," *Appl. Phys. Lett.* **78**(17), 2420–2421 (2001).
- J. Dingjan et al., "A frequency-doubled laser system producing ns pulses for rubidium manipulation," *Appl. Phys. B* **82**(1), 47–51 (2006).
- D. J. J. Hu et al., "Fiber-integrated 780 nm source for visible parametric generation," *Opt. Express* **22**(24), 29726–29732 (2014).
- J. Hansknecht et al., "Synchronous photoinjection using a frequency-doubled gain-switched fiber-coupled seed laser and ErYb-doped fiber amplifier," *Phys. Rev. Spec. Top. Accel. Beams* **9**(6), 063501 (2006).
- J. Dingjan et al., "A frequency-doubled pulsed laser system for rubidium manipulation," *Appl. Phys. B* **82**(1), 47–51 (2006).
- P. Wan et al., "Low repetition rate high energy 1.5 μ m fiber laser," *Opt. Express* **19**(19), 18067–18071 (2011).

Qiang Fang is now the VP of technology in HFB Photonics Co. Ltd. He received his BS degree in electrical engineering and his MS degree in optical engineering from Nankai University in 2005 and 2008, respectively, and his PhD in optics from the College of Optics,

the University of Arizona, in 2012. He authored or coauthored more than 30 journal papers. His current research interests include fiber lasers and amplifiers. He is a member of the Optical Society (OSA) and the Institute of Electrical and Electronics Engineers.

Wei Shi is a professor at Tianjin University. He is an expert of the national Thousand Talents Program. He is a OSA fellow. He is an

adjunct professor of the optical science center at the University of Arizona, the editor of *Applied Optics* and *JOSAB*, and the associate chief editor of *Infrared and Laser Engineering*. He authored or coauthored more than 150 papers with more than 1600 citations. He owns two U.S. patents and more than 20 Chinese patents.

Biographies for the other authors are not available.